



Svenska English


LEDSON
.....
Instruktioner / Instructions
NEXUS

Produktbeskrivning

Ledson Nexus är ett böjbart LED varningsljus med ett effektivt skydd mot stötar och korrosion. Det kan böjas bakåt upp till 30° för montering på böjda ytor men kan också monteras på plana ytor. Nexus har en förbättrad lins för en längre hållbarhet jämfört med traditionella varningsljus. Monteras med 3M tejp eller skruvmontering med sarg.

Tekniska specifikationer

- Silikon, böjbart bakåt upp till 30° för montering på böjda ytor
- Kan också monteras på plana ytor
- Montering med 3M tejp eller skruvas fast med sarg (medföljer)
- 19 olika blyxtmönster
- ECE R65 klass 1, ECE R10
- 2,5 m kabel
- Sykroniseringsbara
- Spänning: DC 10-33V
- Max effekt: 10W
- 6 x 3W LED
- IP69K (vatten- / & dammtät)
- Arbetstemperatur: -30°C till +70°C

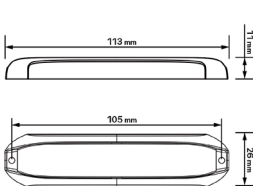


Måtten ovan är inklusive sarg.
Mått för enbart varningsljus (BxHxD): 100x23x10mm




Se till att ytan är 100% ren innan montering med den självhäftande tejp.

Om du ska montera på en böjd yta, bøj då försiktigt varningsljuset innan monteringen.


Kablar och funktion

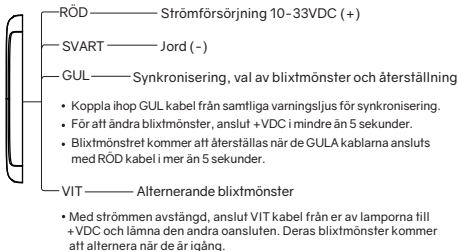

Monteringsmöjligheter



Skruvmontering med sarg

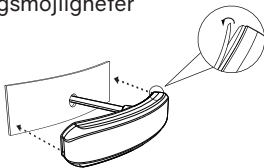

Montering med 3M-tejp



Max 30° vinkel bakåt



Vrid ej



Dra ej




Product description


Ledson Nexus is a bendable warning LED light which has an effective resistance to impact and corrosion. It can bend backwards up to 30° for mounting on curved surfaces but can also be mounted on flat surfaces. Nexus has improved anti-yellowing and antioxidant lens design compared to traditional warning lights. Mounted with 3M VHB tape or screw mounted with the bezel.

Technical specifications

- Silicone, bendable backwards up to 30° for mounting on curved surfaces
- Can also be flat mounted
- Mounted with 3M tape or screwed with bezel (supplied)
- 19 different flash patterns
- ECE R65 class 1, ECE R10
- 2.5 m cable
- Synchronizable
- Voltage: DC 10-33V
- Max power: 10W
- 6 x 3W LED
- IP69K (water- / & dustproof)
- Operating temperature: -30°C to +70°C

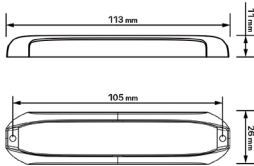


The dimensions are including the bezel.
Dimensions of warning light only (WxHxD): 100x23x10mm




Make sure the surface is 100% clean before mounting with the adhesive tape.
If it will be mounted on a curved surface bend it gently before the mounting.




Wiring and function

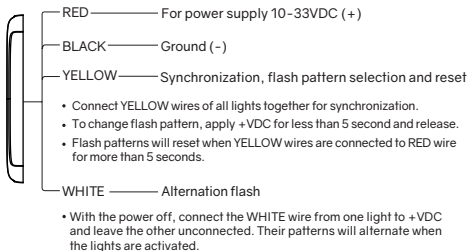

Mounting options



Screw mounting with included bezel

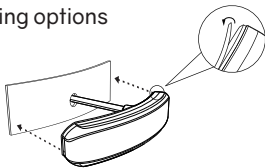

3M VHB tape mounting



No Twisting



Max 30° angle from center



No Pulling

LEDSON