


# SafeKid

## Carefully read the instructions before mounting and installing the product

SafeKid stroller lighting kit consists of 4 IP68-rated LED strips – 1 white (forward), 2 orange (on the sides), and 1 red (backwards). Firstly, check where it may be suitable to mount these on the stroller's frame or on, for example, a walker's frame.

### User manual

1. Clean the mounting surfaces carefully with, for example, rubbing alcohol to remove any grease residue or similar substances to ensure that the double-sided adhesive tape of the LED strips adheres properly.
2. Gather the cables from the strips, use cable ties to neatly collect the cables.
3. Lift up the orange flap on one of the two included lever connectors. Insert the **red** positive wires (+) from each LED strip into separate sockets. Fold down the orange flap to lock/connect the wires together.
4. Repeat step number 3 with the other included lever connector, but with the LED strips' **black** wires.
5. Connect the USB cable's **red** cable to the back of the lever connector with the **red** wires from the LED strips. Connect the USB cable's **black** cable to the back of the lever connector with the **black** wires from the LED strips. See illustration on the right.
5. Connect the USB adapter to the power bank. After that, the installation is complete!

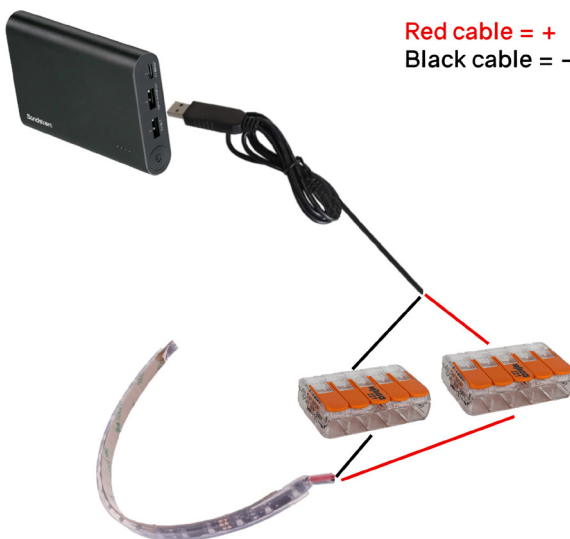

### WARNING!

1. A lever connector is intended for plus or minus cables, therefore you should have two (one for the minus cables and one for the plus cables). The two connectors then enable you to power up to five LED strips.
2. The SafeKid package uses about 1500 mAh/hour so plan your purchase of Powerbank accordingly.
3. Cable length of the USB adapter cable is 90 cm, maximum load 0.4A.